


SPACER KEY A			
DEPTH TABLE -			
Depth	1	Set at	.000
"	2	"	.015
"	3	"	.030
"	4	"	.045
"	5	"	.060

## H1601 - H1609




Key Blanks	Briggs Stratton
Octagon	42755

Key No.	Depth of Cut
H1601	13353
H1602	33353
H1603	11153
H1604	11353
H1605	11553
H1606	33553
H1607	13553
H1608	35553
H1609	15553

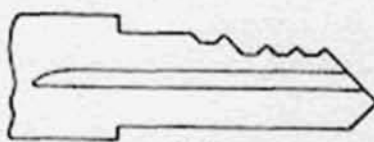

KEY CHANGE H1607 BEFORE FILING.

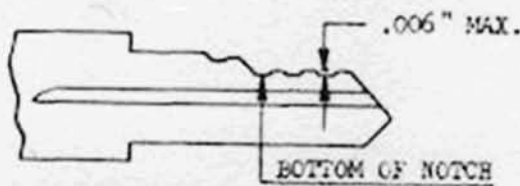

KEY AFTER FILING

### KEY CUTTING INSTRUCTIONS

The above group of key code numbers has been assigned to a new ignition lock switch Briggs & Stratton No. 600580 used by Harley Davidson Motorcycle. The keys supplied as original equipment can be removed in all positions on the switch. However, replacement keys, if cut by the above code alone, cannot be removed in all positions. It is necessary in addition, to file the high points formed by the notches, so that no point is more than .006 higher than the bottom of the companion notch. The removal of the high points will allow the key to be withdrawn in all positions.

Briggs & Stratton  
Octagon Key Blank #42755

Key No.	Depth of Cut
H1601	13353
H1602	33355
H1603	11153
H1604	11353
H1605	11555
H1606	33555
H1607	13555
H1608	35555
H1609	15555