

PART NUMBER

70059-66

Orig. 8-65

INSTRUCTIONS

AMF | HARLEY-DAVIDSON

**GENUINE PARTS
AND ACCESSORIES**

BUTTON SWITCH REPAIR KIT


Use this kit for repairing any Harley-Davidson 2-wire button switch.

Remove old switch assembly. Only the housing and two mounting screws will be re-used. Unsolder or cut wires from contacts. The wire ends should have about 1/4 inch of insulation stripped off.

Lead one wire through cup, lower contact, plastic washer and spring to upper contact. Be sure parts are arranged as shown at right. Insert one wire end through center of upper contact, spread strands out flat over contact and solder.

Lead second wire through cup and solder to lower contact.

Insert button and assembled parts in housing and reinstall switch on handlebar.

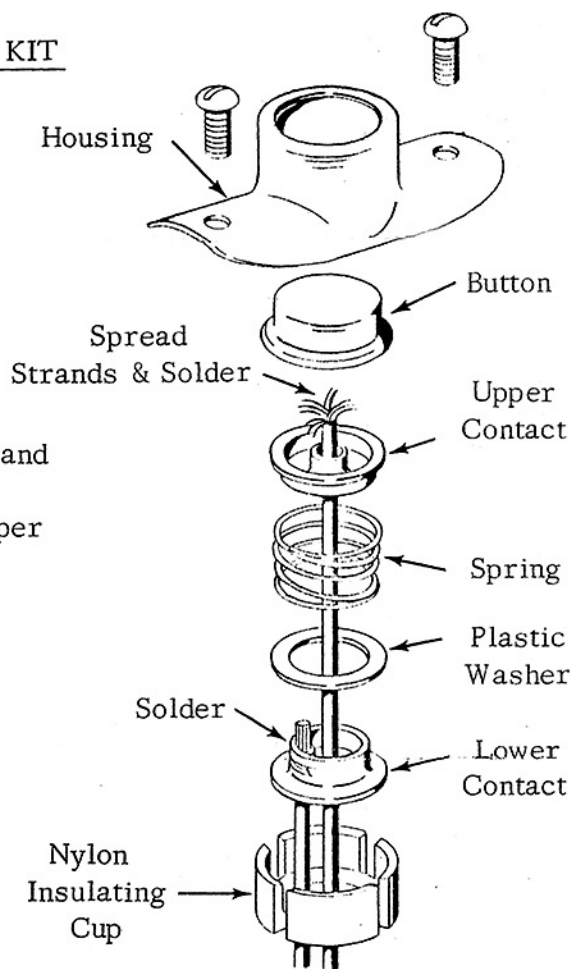

Harley-Davidson, Inc. has given us permission to provide this document on our website for the sole purpose of helping us restore our motorcycles.

Harley-Davidson, Inc. retains copyright over these materials, and NO reproduction or other use of these materials is permitted without prior authorization from Harley-Davidson, Inc.

The **Old Sportster and K-model Research Group (OSKRG)** is a group of individuals who have spent years researching the minute differences in the parts, fit, finish, and configuration of the Harley-Davidson 1952-1956 K-Models, and (early) 1957-1969 Sportster models.

The results of our research is published on our website
www.harleyKmodel.com